GaNFast™ Power FET


1. Features

GaNFast™ Power IC


- eMode GaN power FET
- Low 150 mΩ resistance
- 10 MHz switching frequency capability
- Ultra-low gate charge
- Zero reverse recovery charge
- Low output charge
- 800 V Transient Voltage Rating
- 700 V Continuous Voltage Rating
- Source Kelvin (SK) pin for gate noise immunity
- Small, low-profile SMT DFN
- 8x8 mm PCB footprint
- Minimized package inductance
- Low thermal resistance
- Bottom-side cooled

Environmental


- RoHS, Pb-free, REACH-compliant



PDFN 8x8 mm



Package Outline (Top View)



Simplified Schematic

2. Topologies / Applications

- AC-DC, DC-DC, DC-AC
- QR flyback, ACF, buck, boost, half bridge, full bridge, LLC resonant, Class D, PFC
- Wireless power
- LED lighting
- Solar Micro-inverters
- TV SMPS
- Server, Telecom

3. Description

This GaNFast™ power FET is a high performance eMode GaN FET that achieves excellent high-frequency and high efficiency operation. Features include a simple gate input and a Source Kelvin pin for noise immunity.

This GaN power FET combines the highest dV/dt immunity and industry-standard low-profile, low-inductance, bottom-side cooled SMT DFN packaging to enable designers to achieve simple, quick and reliable solutions.

Navitas' GaN technology extends the capabilities of traditional topologies such as flyback, half-bridge, buck/boost, LLC and other resonant converters to reach MHz+ frequencies with very high efficiencies and low EMI to achieve unprecedented power densities at a very attractive cost structure.

4. Table of Contents

1. Features **1**
2. Topologies / Applications **1**
3. Description **1**
4. Table of Contents **2**
5. Specifications **3**
5.1. Absolute Maximum Ratings(1) 3
5.2. Thermal Resistance 3
5.3. Electrical Characteristics 4
5.4. Characteristic Graphs 5
6. Pin Configurations and Functions **7**
7. Drain-to-Source Voltage Considerations **8**
8. PCB Layout Guidelines **9**
9. Recommended PCB Land Pattern **9**
10. PDFN Package Outline **9**
11. Tape and Reel Dimensions **10**
12. Ordering Information **10**
13. Revision History **10**

5. Specifications

5.1. Absolute Maximum Ratings(1)

(with respect to Source (pad) unless noted)

SYMBOL	PARAMETER	MAX	UNITS
$V_{DS(TRAN)}$	Transient Drain-to-Source Voltage(2)	800	V
$V_{DS(CONT)}$	Continuous Drain-to-Source Voltage	-7 to +700	V
V_{GS}	Continuous Gate-to-Source Voltage	-10 to +7	V
V_{TGS}	Transient Gate-to-Source Voltage(3)	-20 to +10	V
I_D	Continuous Drain Current (@ T_C = 25ºC)	11	A
I_D	Continuous Drain Current (@ T_C = 100ºC)	7	A
I_D PULSE	Pulsed Drain Current (10 µs @ T_J = 25°C)	20	A
dV/dt	Slew Rate on Drain-to-Source	200	V/ns
T_J	Operating Junction Temperature	-55 to 150	ºC
T_{STOR}	Storage Temperature	-55 to 150	ºC

(1) Absolute maximum ratings are stress ratings; devices subjected to stresses beyond these ratings may cause permanent damage.

(2) $V_{DS\ (TRAN)}$ rating allows for surge ratings during non-repetitive events that are < 100us (for example start-up, line interruption). $V_{DS\ (TRAN)}$ rating allows for repetitive events that are < 100ns, with 80% derating required (for example repetitive leakage inductance spikes). Refer to Section 7 for detailed recommended design guidelines.

(3) < 1 µsec

5.2. Thermal Resistance

SYMBOL	PARAMETER	TYP	UNITS
$R_{\theta JC}$ (4)	Junction-to-Case	1.3	ºC/W
$R_{\theta JA}$ (4)	Junction-to-Ambient	35	ºC/W

(4) R_θ measured on DUT mounted on 1 square inch 2 oz Cu (FR4 PCB)

5.3. Electrical Characteristics

Typical conditions: V_{DS} = 400 V, F_{SW} = 1 MHz, T_{AMB} = 25 ºC, I_D = 4 A (or specified)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	CONDITIONS
GaN FET Characteristics						
I_{DSS}	Drain-Source Leakage Current		4		µA	V_{DS} = 900 V, V_{GS} = 0 V
I_{DSS}	Drain-Source Leakage Current		0.3	25	µA	V_{DS} = 700 V, V_{GS} = 0 V
I_{DSS}	Drain-Source Leakage Current		15		µA	V_{DS} = 700 V, V_{GS} = 0 V, T_C = 150 ºC
I_{GSS}	Gate-Source Leakage Current		35		µA	V_{GS} = 6 V
$R_{DS(ON)}$	Drain-Source Resistance		150	210	mΩ	V_{GS} = 6 V, I_D = 4 A, T_J = 25 ºC
$R_{DS(ON)}$	Drain-Source Resistance		345		mΩ	V_{GS} = 6 V, I_D = 4 A, T_J = 150 ºC
$V_{GS(th)}$	Gate Threshold Voltage	1	1.7	2.6	V	I_D = 7 mA, V_{DS} = 0.1 V
V_{SD}	Source-Drain Reverse Voltage		3.2	5	V	V_{GS} = 0 V, I_{SD} = 4 A
Q_{RR}	Reverse Recovery Charge		0		nC	
R_G	Internal Gate Resistance		1.6		Ω	
C_{ISS}	Input Capacitance		74		pF	V_{DS} = 400 V, V_{GS} = 0 V
C_{OSS}	Output Capacitance		21		pF	V_{DS} = 400 V, V_{GS} = 0 V
C_{RSS}	Reverse Transfer Capacitance		0.2		pF	V_{DS} = 400 V, V_{GS} = 0 V
Q_G	Total Gate Charge		2.4		nC	V_{GS} = 0-6 V, I_D = 8 A, V_{DS} = 400 V
Q_{GD}	Gate-to-Drain Charge		1.0		nC	V_{GS} = 0-6 V, I_D = 8 A, V_{DS} = 400 V
Q_{GS}	Gate-to-Source Charge		0.5		nC	V_{GS} = 0-6 V, I_D = 8 A, V_{DS} = 400 V
Q_{OSS}	Output Charge		15		nC	V_{GS} = 0 V, V_{DS} = 400 V
$C_{O(er)}$ (5)	Effective Output Capacitance, Energy Related		26		pF	V_{DS} = 400 V, V_{GS} = 0 V
$C_{O(tr)}$ (6)	Effective Output Capacitance, Time Related		38		pF	V_{DS} = 400 V, V_{GS} = 0 V

(5) $C_{O(er)}$ is a fixed capacitance that gives the same stored energy as C_{OSS} while V_{DS} is rising from 0 to 400 V

(6) $C_{O(tr)}$ is a fixed capacitance that gives the same charging time as C_{OSS} while V_{DS} is rising from 0 to 400 V

5.4. Characteristic Graphs

(GaN FET, T_C = 25 ºC unless otherwise specified)

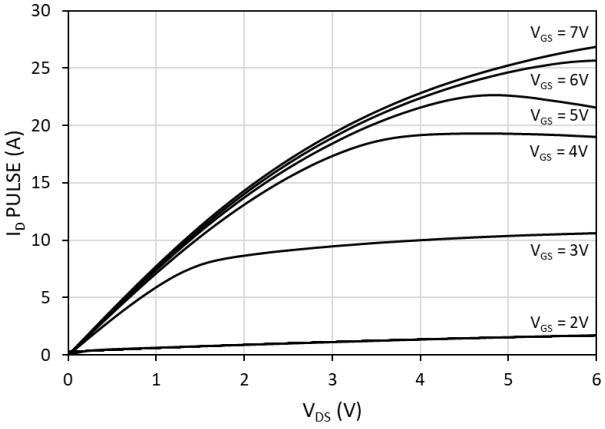


Fig. 1 Pulsed drain current (I_D PULSE) vs. drain-to-source voltage (V_{DS}) at T = 25 °C

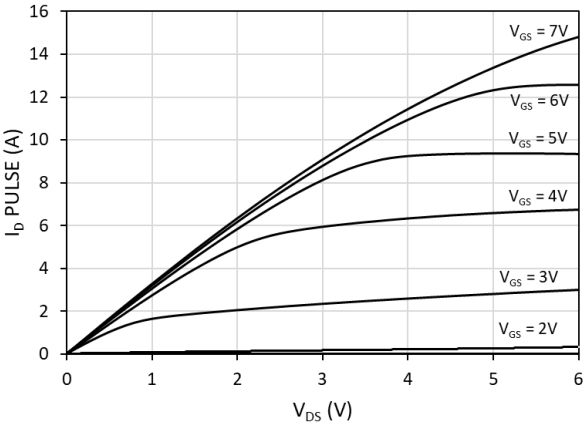


Fig. 2 Pulsed drain current (I_D PULSE) vs. drain-to-source voltage (V_{DS}) at T = 150 °C

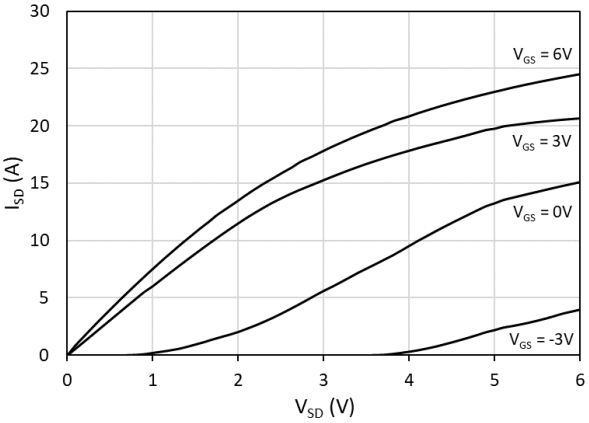


Fig. 3 Source-to-drain reverse conduction voltage at T = 25 °C

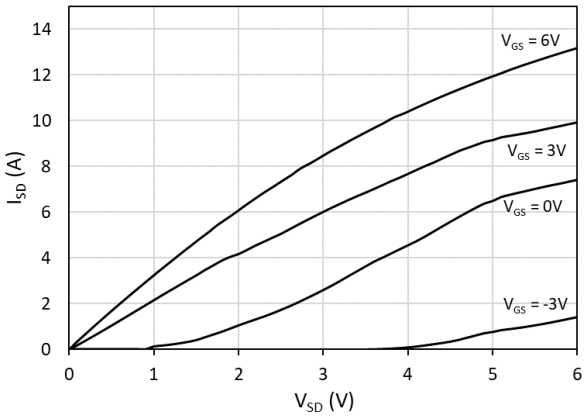


Fig. 4 Source-to-drain reverse conduction voltage at T = 150 °C

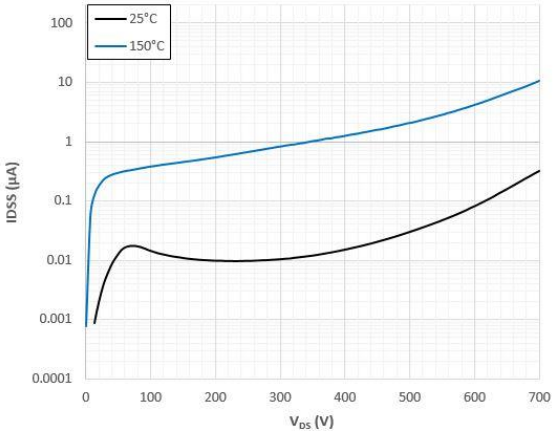


Fig. 5 Drain-to-source leakage current (I_{DSS}) vs. drain-to-source voltage (V_{DS})

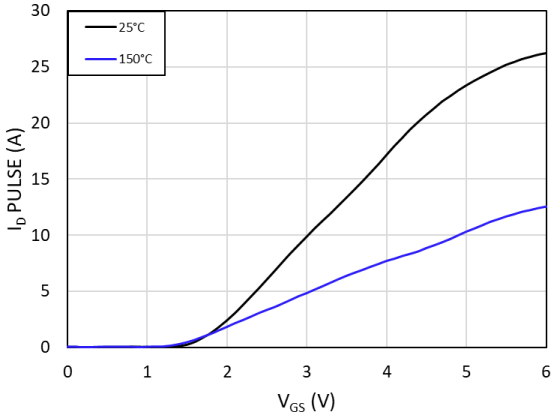


Fig. 6 Pulsed drain current (I_D PULSE) vs. gate-to-source voltage (V_{GS})

Characteristic Graphs (Cont.)

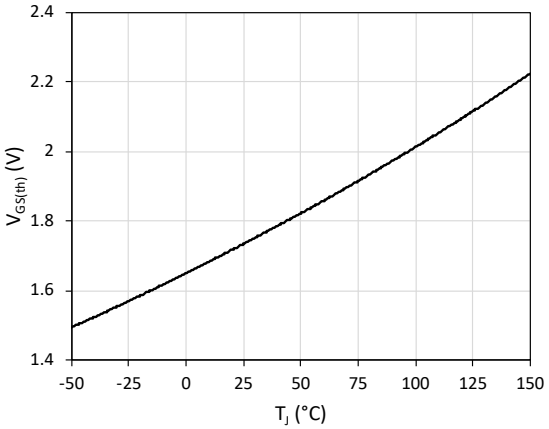


Fig. 7 Gate threshold voltage ($V_{GS(th)}$) vs. junction temperature (T_J)

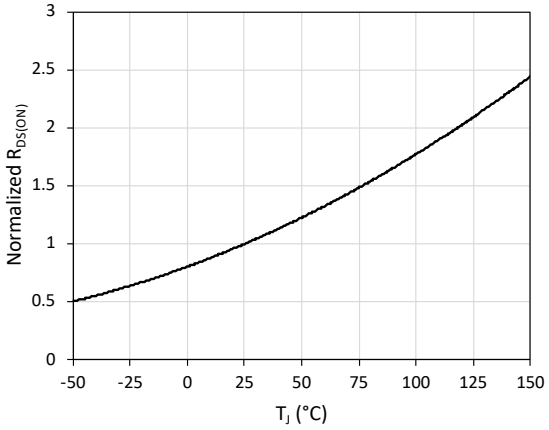


Fig. 8 Normalized on-resistance ($R_{DS(ON)}$) vs. junction temperature (T_J)

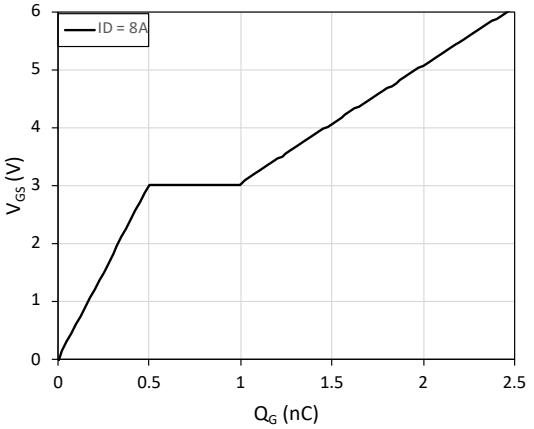


Fig. 9 Gate-to-source voltage (V_{GS}) vs. total gate Charge (Q_G)

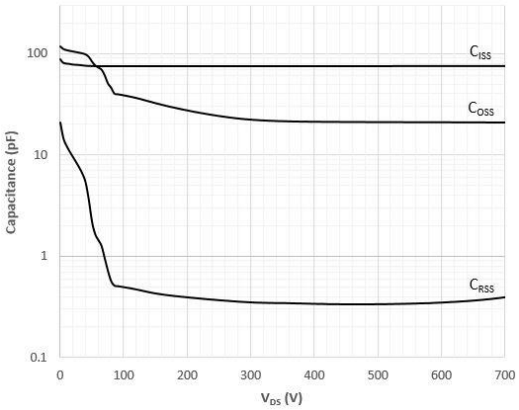


Fig. 10 Input Capacitance (C_{ISS}), Output capacitance (C_{OSS}), Reverse Transfer capacitance (C_{RSS}), vs. drain-to-source voltage (V_{DS})

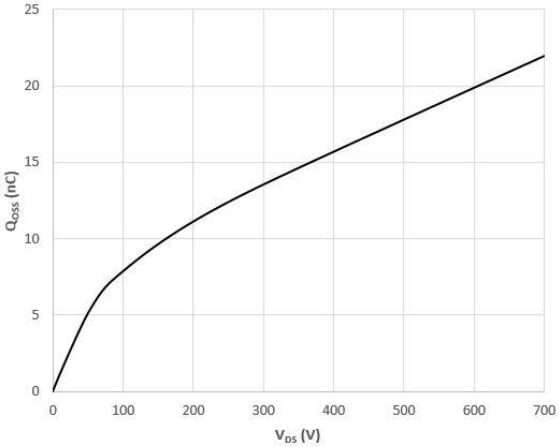


Fig. 11 Charge stored in output capacitance (Q_{OSS}) vs. drain-to-source voltage (V_{DS})



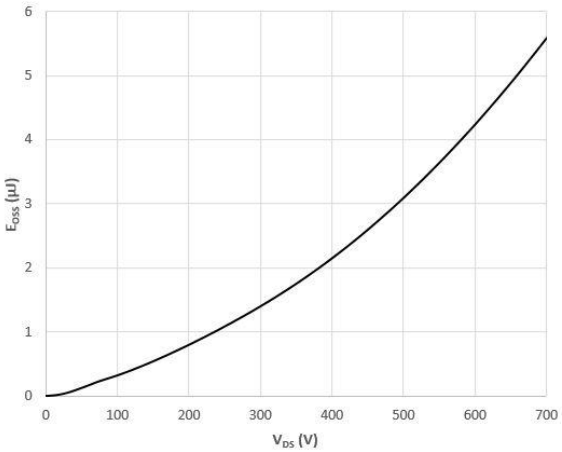


Fig. 12 Energy stored in output capacitance (E_{OSS}) vs. drain-to-source voltage (V_{DS})

6. Pin Configurations and Functions



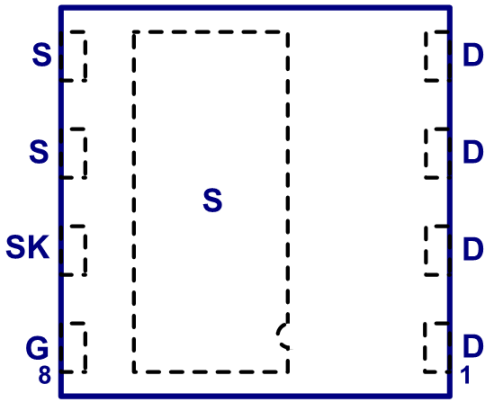

Package Top View

Pin Number	Pin Name	Description
5, 6	NC	No connection, leave floating or connect to Source PAD
7	SK	Kelvin sense of FET source. Use for driver connection
8	G	Gate of power FET
1, 2, 3, 4	D	Drain of power FET
PAD	S	Source of power FET. Metal pad on bottom of package.

7. Drain-to-Source Voltage Considerations

GaN Power ICs have been designed and tested to provide significant design margin to handle transient and continuous voltage conditions that are commonly seen in single-ended topologies, such as quasi-resonant (QR) flyback applications. The different voltage levels and recommended margins in a typical QR flyback can be analyzed using Fig. 13. When the device is switched off, the energy stored in the transformer leakage inductance will cause V_{DS} to overshoot to the level of V_{SPIKE}. The clamp circuit should be designed to control the magnitude of V_{SPIKE}. After dissipation of the leakage energy, the device V_{DS} will settle to the level of the bus voltage plus the reflected output voltage which is defined in Fig. 13 as V_{DS-OFF}.

- For repetitive events, 80% derating should be applied from $V_{DS\ (TRAN)}$ rating (800V) to 640V max under the worst case operating conditions.
- It is recommended to design the system such that V_{DS-OFF} is derated 80% from the $V_{DS(CONT)}$ (700V) max rating to 560V.
- For half-bridge based topologies, such as LLC, V_{DS} voltage is clamped to the bus voltage. V_{DS} should be designed such that it meets the V_{DS-OFF} derating guideline (560V).
- Non-repetitive events are infrequent, one-time conditions such as line surge, ESD, and lightning. No derating from the $V_{DS(TRAN)}$ rating (800V) is needed for non-repetitive V_{SPIKE} durations < 100 µs. The $V_{DS(TRAN)}$ rating (800V) allows for repetitive events that are <100ns, with 80% derating required (for example repetitive leakage inductance spikes).


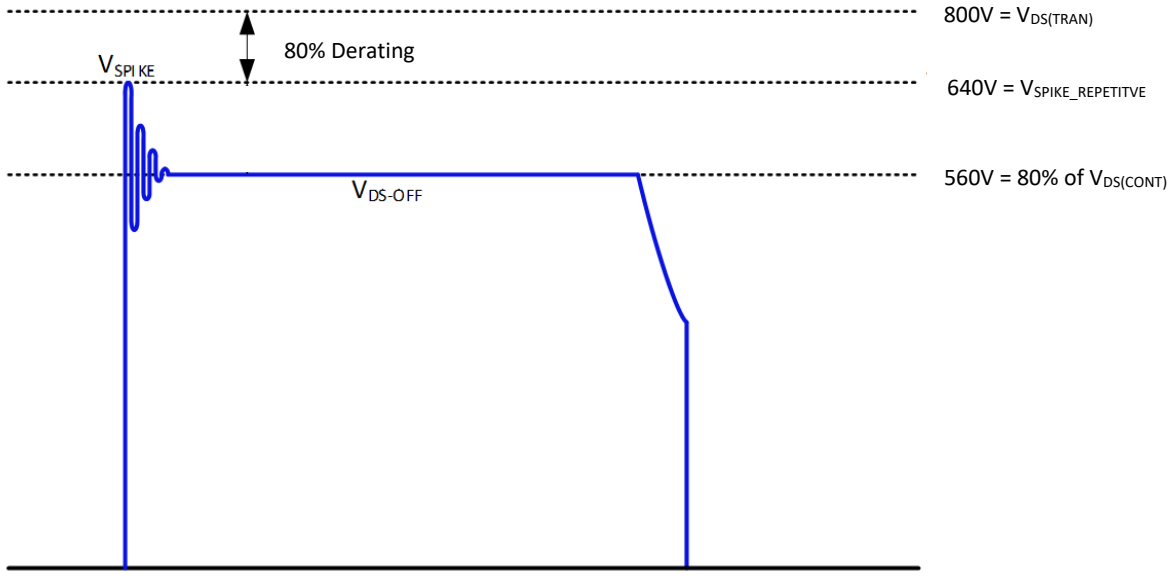


Fig. 13. QR flyback drain-to-source voltage stress diagram

8. PDFN Package Outline

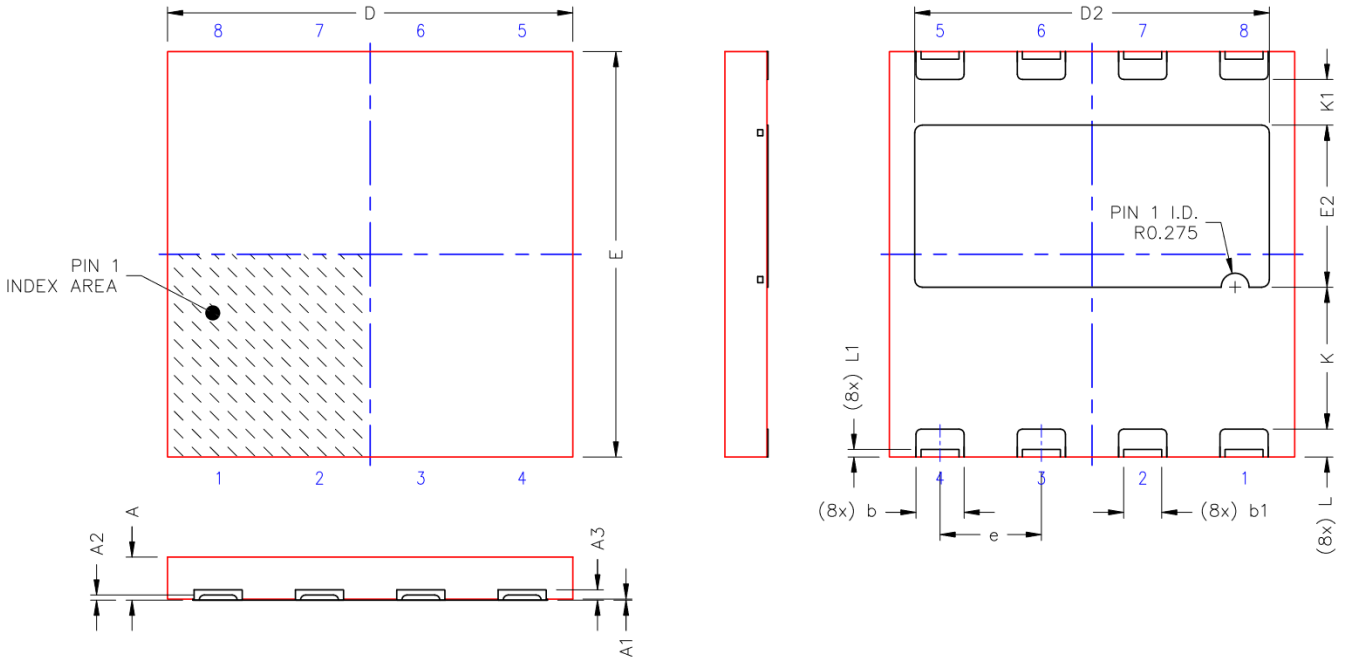

SYM	MIN	NOM	MAX
A	0.80	0.85	0.90
A1	0.00	–	0.05
A2	–	0.102 REF.	–
A3	–	0.203 REF.	–
b	0.90	0.95	1.00
b1	–	0.75 REF.	–
D	7.90	8.00	8.10
D2	6.95	7.00	7.05
E	7.90	8.00	8.10
E2	3.15	3.20	3.25
e		2.00 TYP.	
K	–	2.80 REF.	–
K1	–	0.90 REF.	–
L	0.50	0.55	0.60
L1	–	0.15 REF.	–

NOTES:

1. DIMENSIONING AND TOLERANCING CONFORM TO ASME Y14.5M – 1994.
2. ALL DIMENSIONS ARE IN MILLIMETERS.
3. MAXIMUM ALLOWABLE BURRS IS 0.050 MM IN ALL DIRECTIONS.

9. Ordering Information

Part Number	Operating Temperature Grade	Storage Temperature Range	Package	MSL Rating	Packing (Tape & Reel)
NV6025C-RA	-55 °C to +150 °C T_{CASE}	-55 °C to +150 °C T_{CASE}	8 x 8 mm DFN	3	1,000 : 7” Reel
NV6025C	-55 °C to +150 °C T_{CASE}	-55 °C to +150 °C T_{CASE}	8 x 8 mm DFN	3	3,000 : 13” Reel

10. Revision History

Date	Status	Notes
Nov 20, 2022	PRELIMINARY	First Publication
May 14, 2023	PRELIMINARY	Updated simplified schematic pinout, page 1 & 7
Aug 8, 2023	PRELIMINARY	Updated package pin numbers, front page Updated I_D Continuous Drain Current (@ T_C = 25ºC) = 11A, Continuous Drain Current (@ Tc = 25ºC) = 7A, Pulsed Drain Current = 20A, Absolute Maximum Ratings, page 3
Nov 4, 2023	PRELIMINARY	Updated FET parameters (Rg, Ciss, Coss, Crss) Add RDSON @ Tj = 150C (typ)
Apr. 17, 2024	**Final**	Update POD, update VDSmax footnote, update Section 7 Drain-to-Source Voltage Considerations
Aug. 19, 2024	**Final**	Update VDSmax(cont) = 700V, Update Section 7 Drain-to-Source Voltage Considerations
Sept. 18, 2024	**Final**	Added I_DSS (4uA typ) @ 900V
Oct. 16, 2024	**Final**	Updated 13” Reel to 3k

Additional Information

DISCLAIMER Navitas Semiconductor (Navitas) reserves the right to modify the products and/or specifications described herein at any time and at Navitas’ sole discretion. All information in this document, including descriptions of product features and performance, is subject to change without notice. Performance specifications and the operating parameters of the described products are determined in the independent state and are not guaranteed to perform the same way when installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied. This document is presented only as a guide and does not convey any license under intellectual property rights of Navitas or any third parties. Navitas’ products are not intended for use in applications involving extreme environmental conditions or in life support systems. Terms and Conditions.
Navitas Semiconductor, Navitas, GaNFast, GaNSense and associated logos are registered trademarks of Navitas.

Copyright ©2024 Navitas Semiconductor. All rights reserved

Contact info@navitassemi.com